

EC-L2



S H I C C.,L .



BAKERS



1. EC-L2 *1
2. 8 *1
3. *1
4. AC220V



1

2

3

:

1)

2)

3)

4)

5)


6)

1)

2)




要求滤波器输入和输出线尽量远离布线，输入电源线在机箱内尽量短

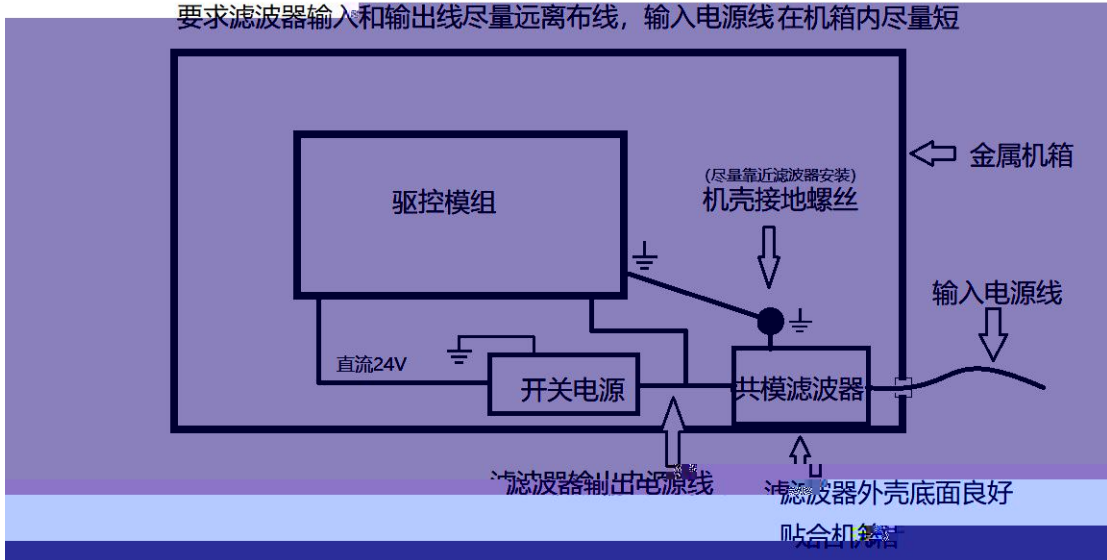

*


*

高压线路和低压线路分离布线，马达输出连接线远离信号IO(输入输出)和通讯电缆

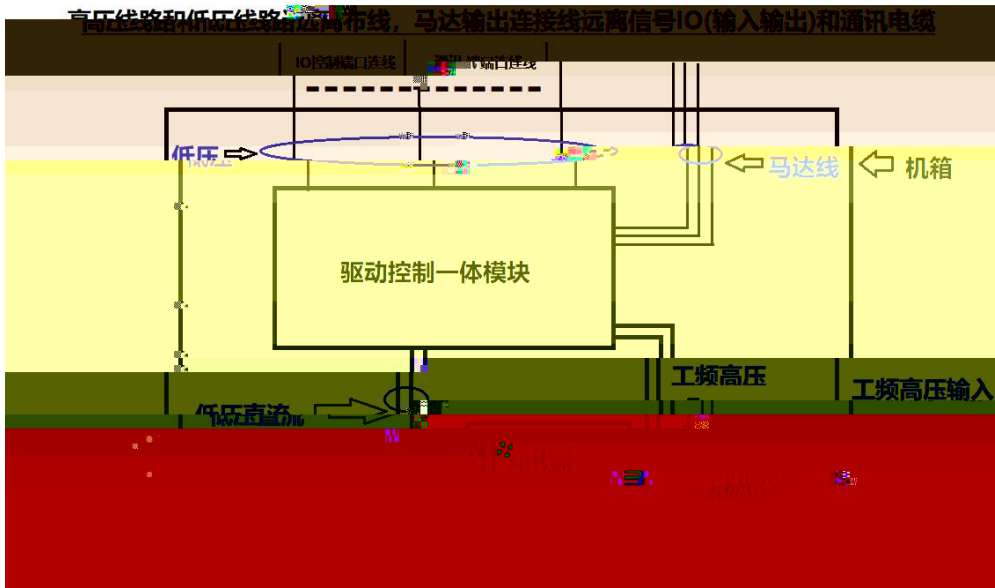


*


*

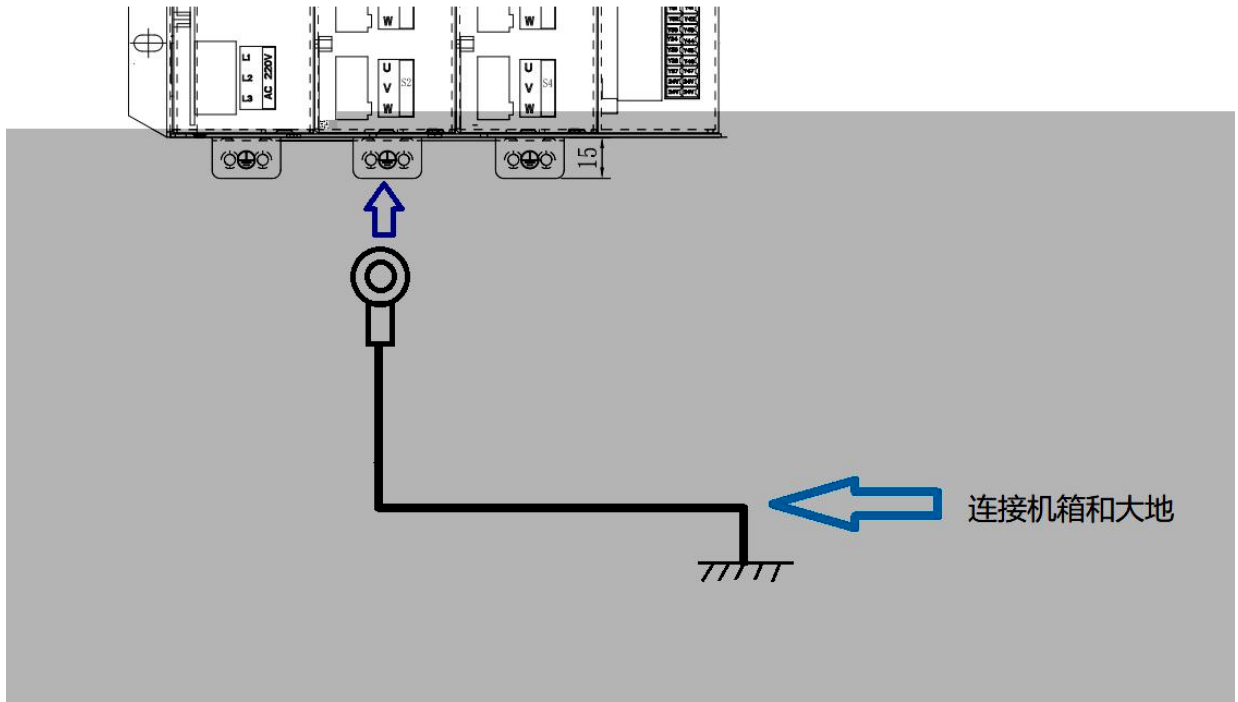

*

*

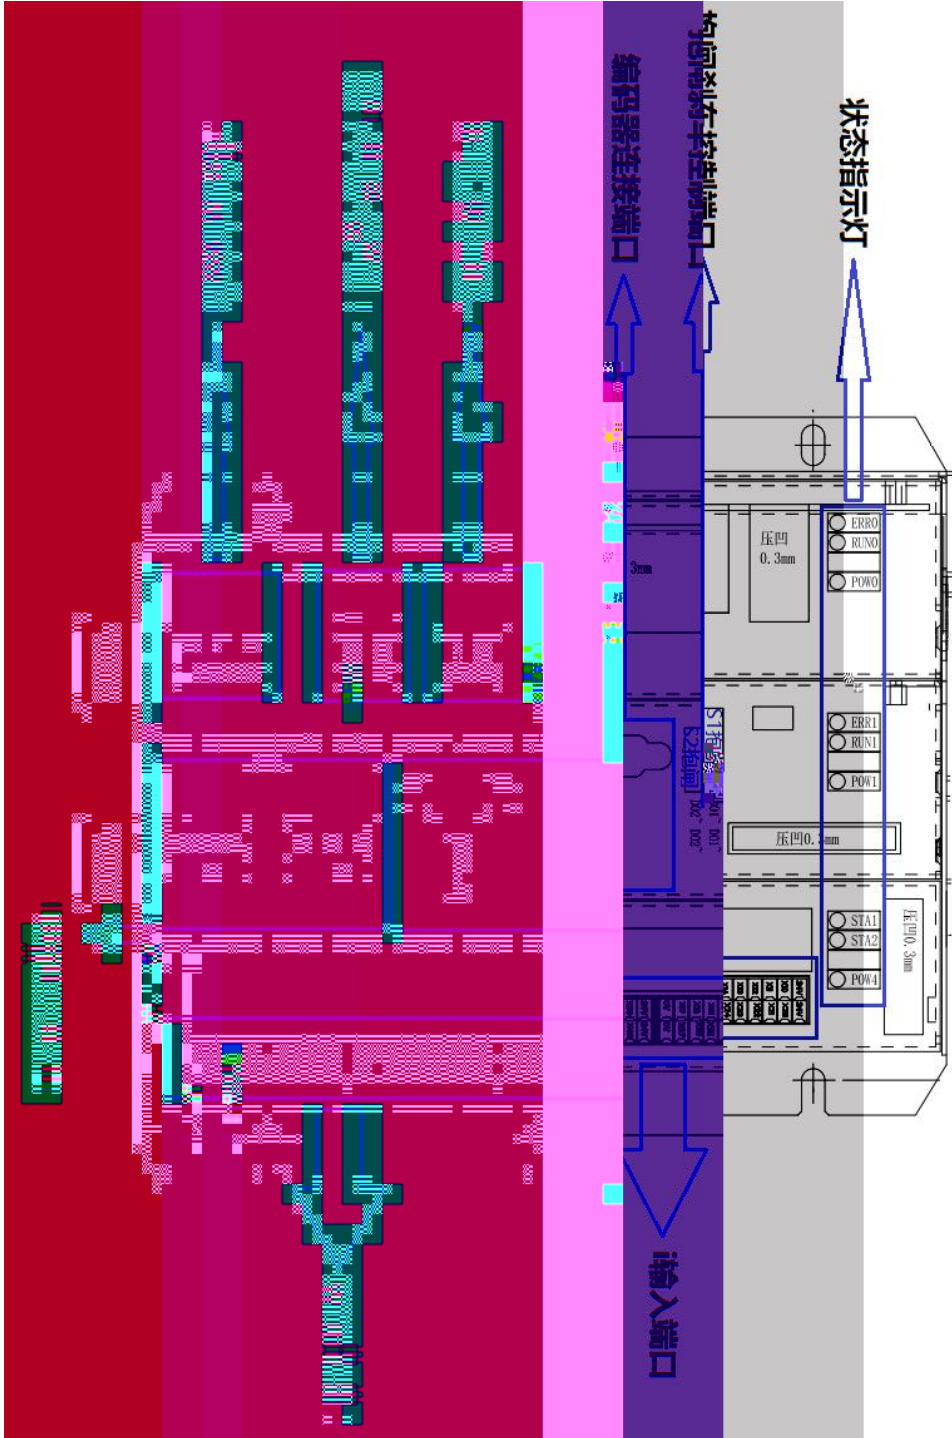

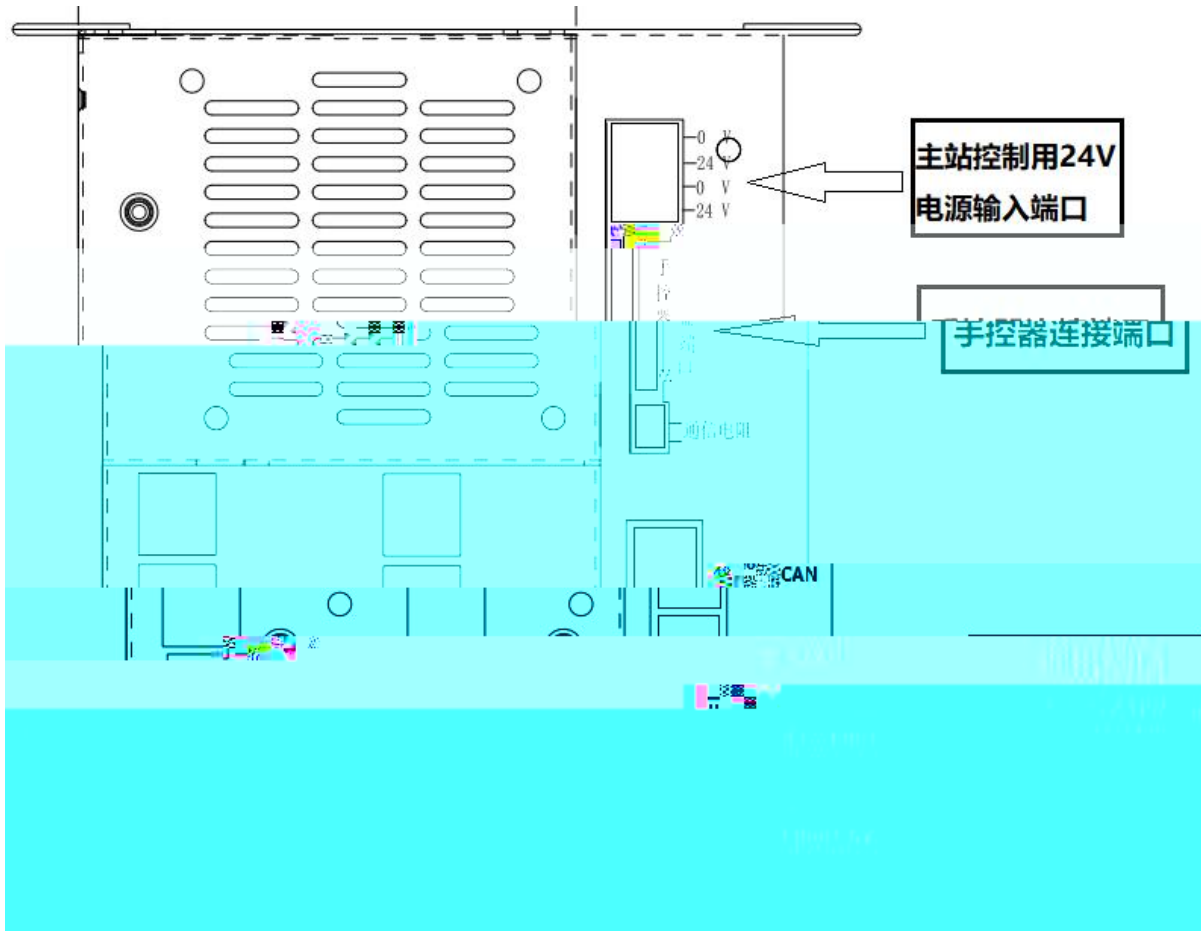


	L1C		220V	
	L2C		50/60HZ	
	BP			
	L1		/	
	L2		220V	
	L3		50/60HZ	
	U			UWW
	V			
	W			
	PE			
ENCODER1-2	5V+		5V	
	5V-		5V	
	D+			
	D-			
BRK	BRK1- BRK5			

	485+	R485	115200bps		
	485-				
	CANA	CAN	115200bps		
	CANB				
24V	24V	24V	24V		
	0V				
	24V	24V			
	0V				
	X10- X47		24V	0V	
	Y10- Y47	MS	24V	500mA	65V
			5A/250VAC/30VDC		
	R+		PC		
	R-				
	TX+				
	TX-				



主站单元输入输出接线图例

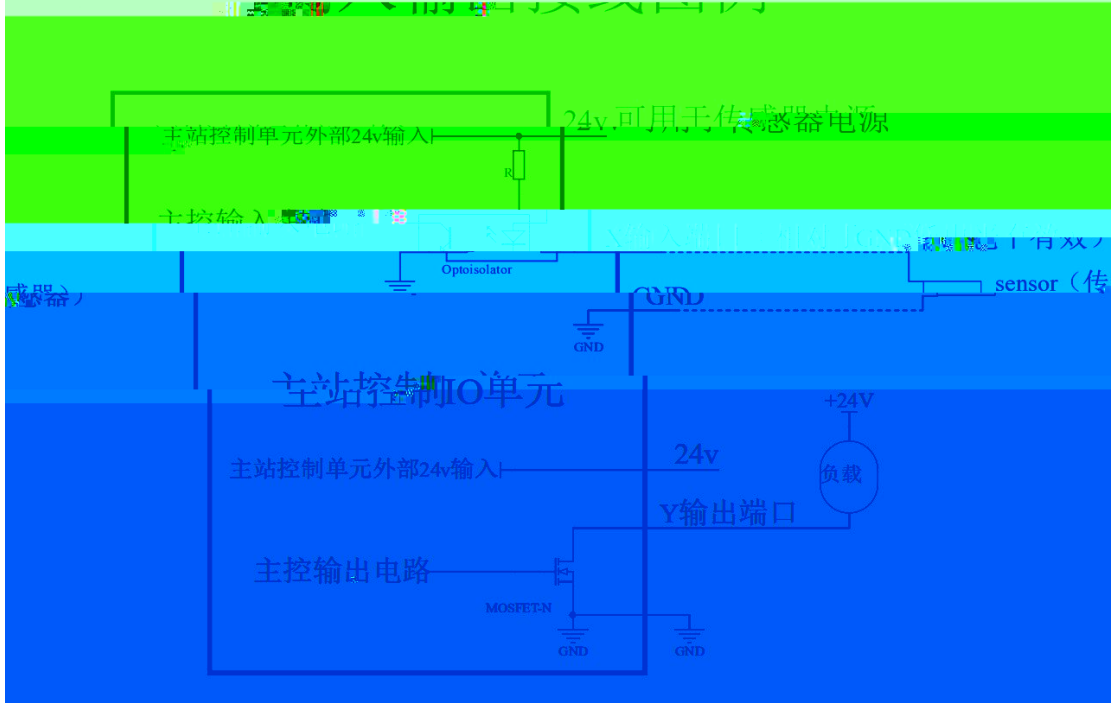



X10 --- X47

Y10 --- Y47

Y

24V

500mA







MLEX-50361672			MLEX-39000059			
	1	2	4	5	3	6
	U	V	W	PE	NC	NC

MLEX-50361672			MLEX-39000059			
	1	2	4	5	3	6
	U	V	W	PE	Br	Br


1 750W

-



DB9		AMP-TE/ /170361-1	
8	SD+	3	SD+
4	SD-	6	SD-
9	5V	9	5V
5	0V	8	0V
		7	FG
		1	VB+
		4	VB-

95 84





DB9 接口






电机端编码器

DB9		17		
		M3102A 20-29P/17		
8	SD+	A	B	G
4	SD-	SD+	SD-	5V
9	5V	H	J	E
5	0V	0V	FG	VB+
		F		
		VB-		

95 84





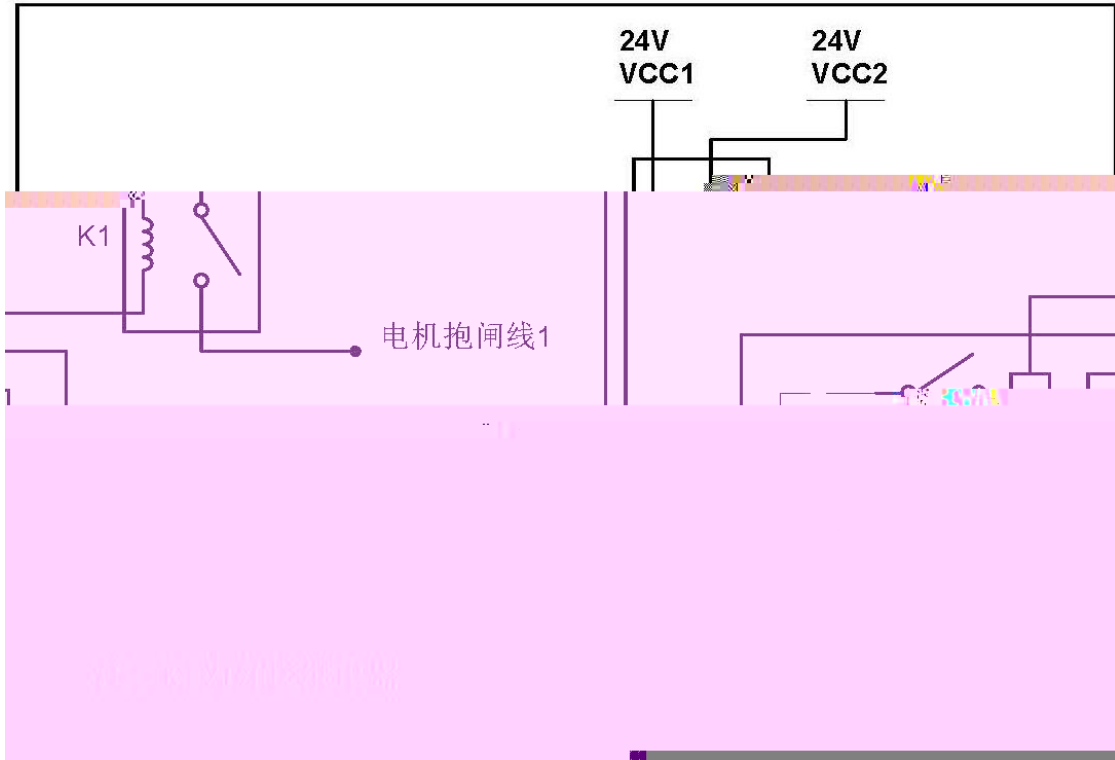



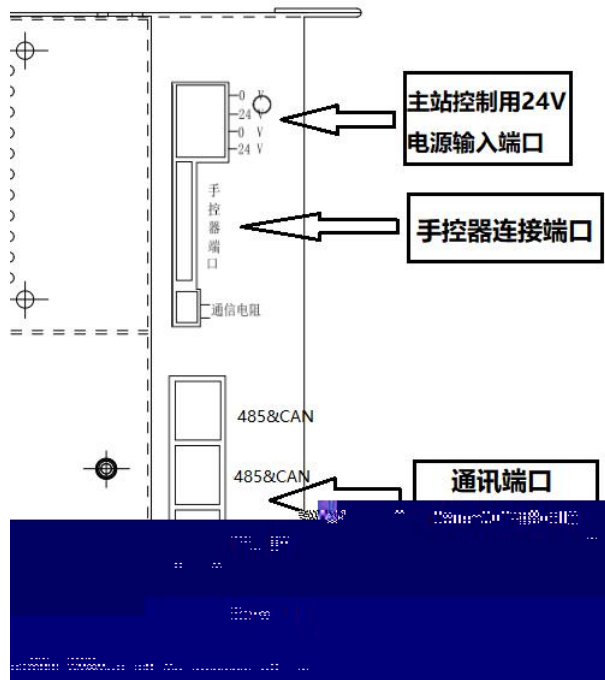
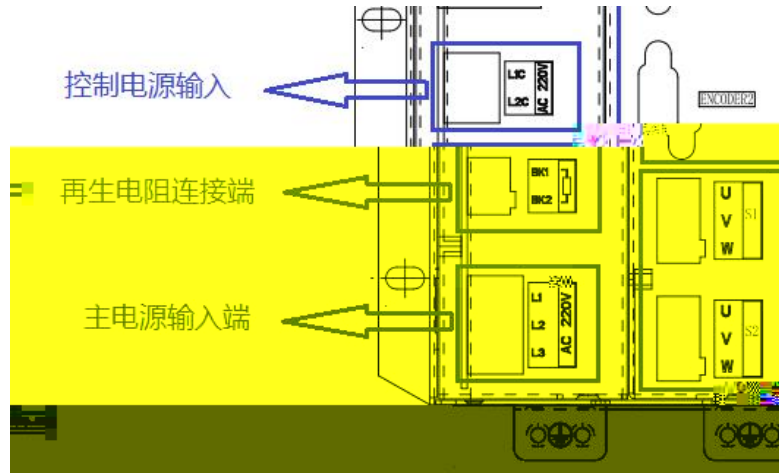



	A	B
1	CAN1	
2	1#	CANL
3	2#	CANH
4	3#	0V-ISO
5	4#	485-1A
6	5#	485-1B
7	6#	GND
8	7#	485-2A
9	8#	485-2B

CAN2

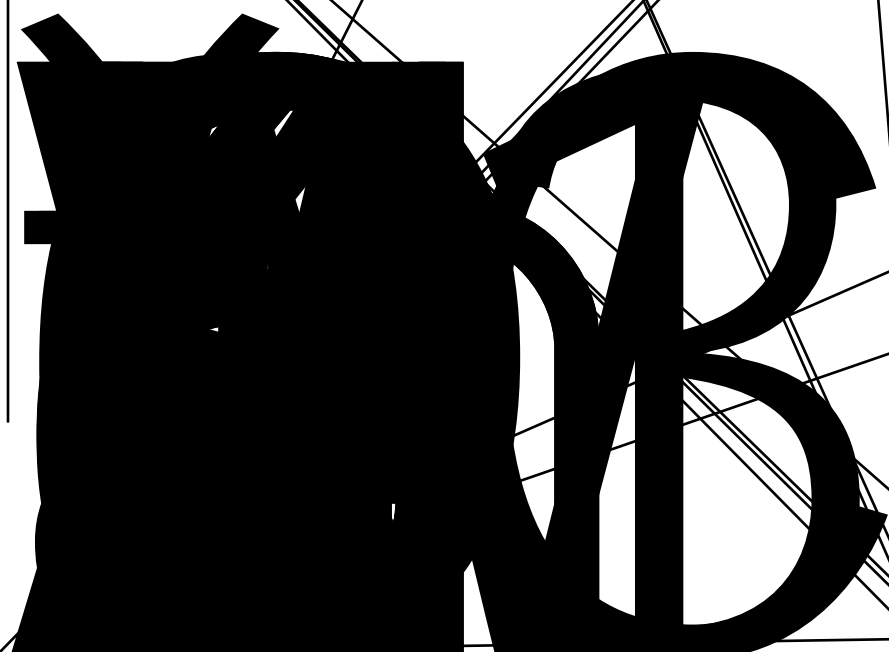
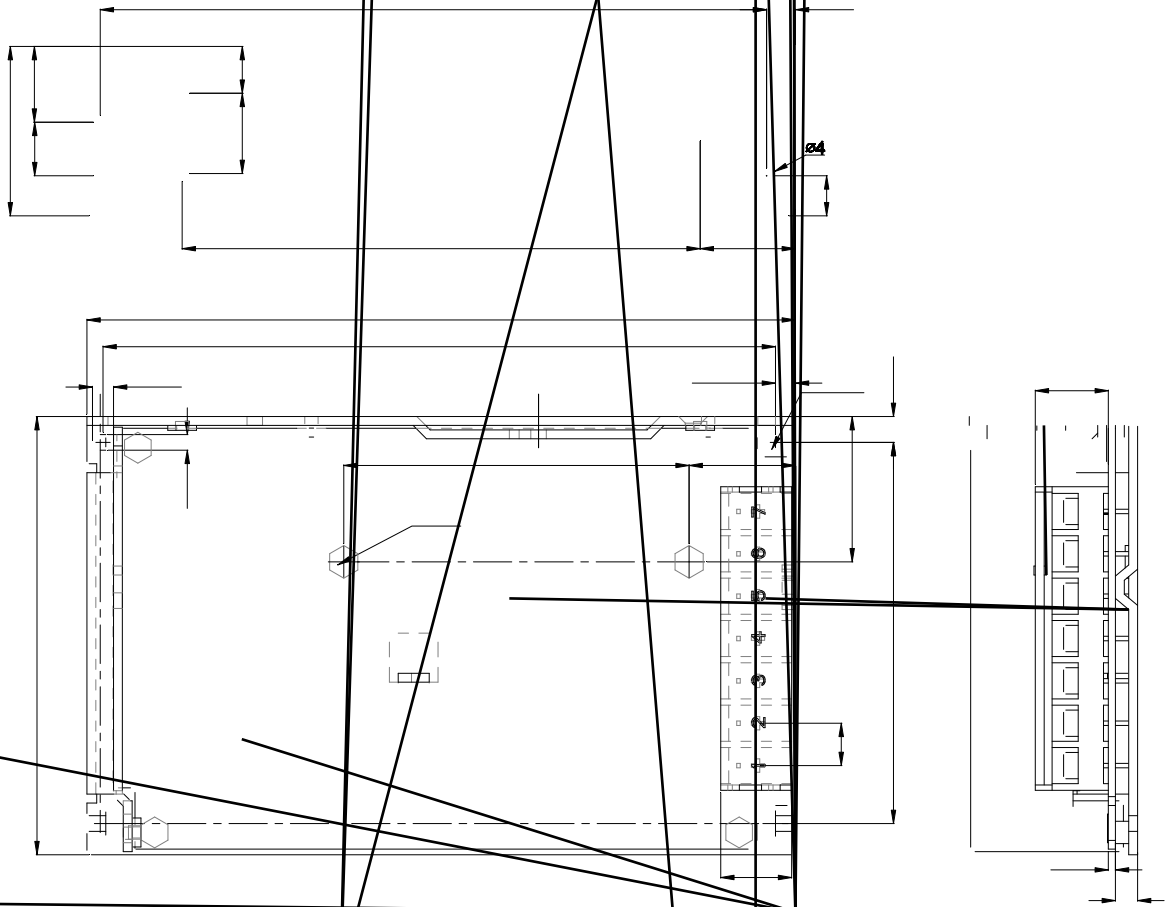




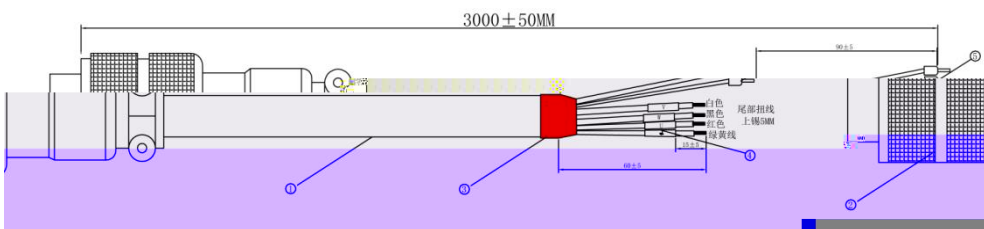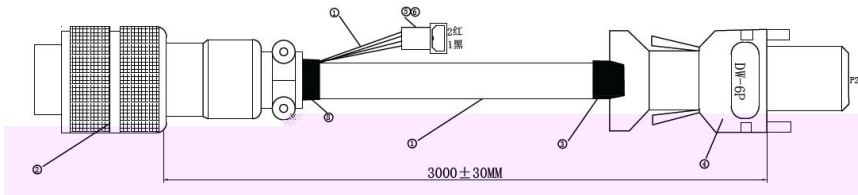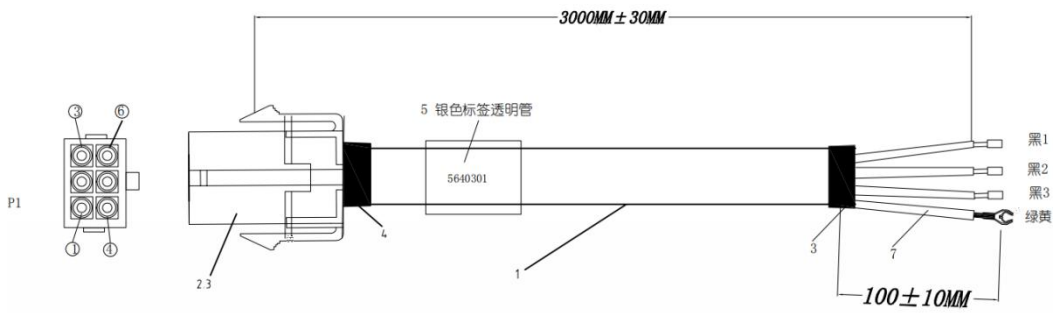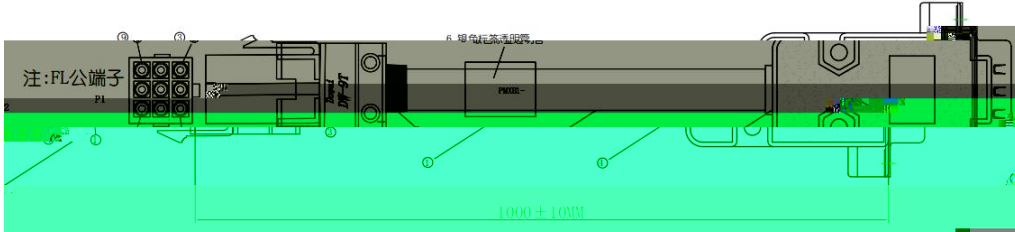

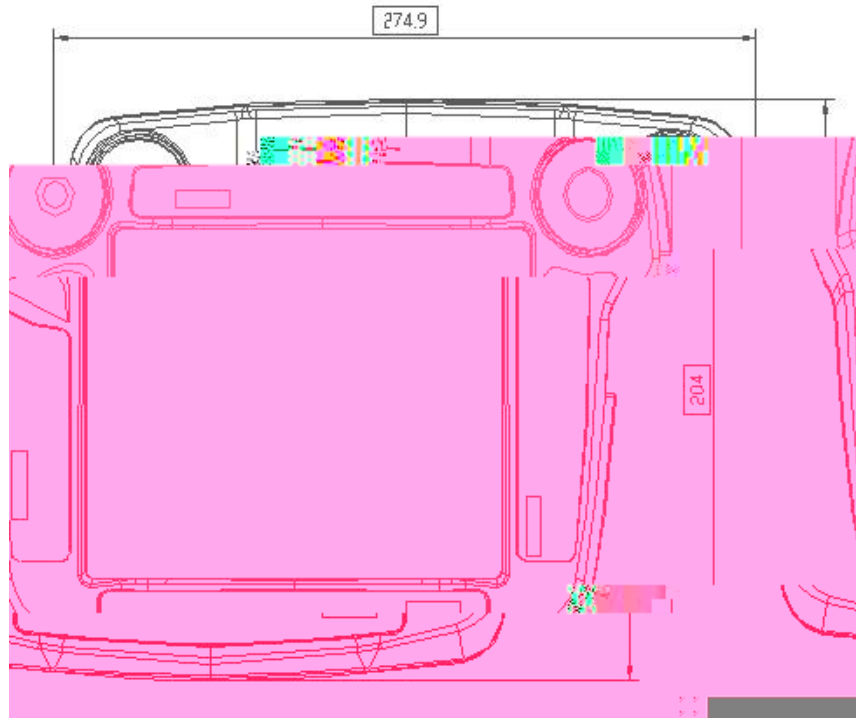

品名：12P航空头转接线 L=0.5M

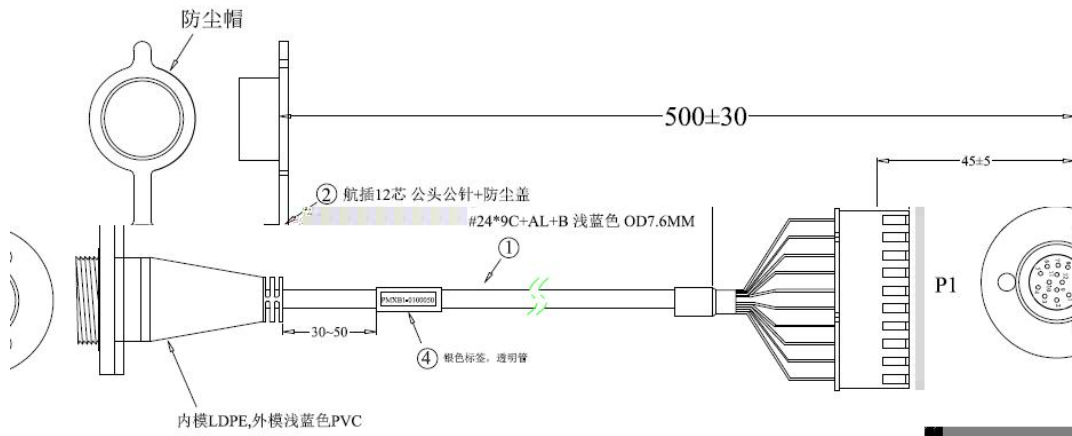



8

518000

0755- 26417678

0755- 26416578

<http://www.hc-system.com>

